







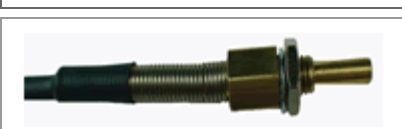


TEMPERATURE PROBES

Probe	Description	Thread Type	Max Temp
	<p>P-100 CHT Probe. Screw-in Type. Can be used in pressure environment.</p>	3/8"-24	700' (F)
	<p>P-101 CHT Probe. Military, 1/4 turn lock for quick disconnect.</p>	Uses A-101	700' (F)
	<p>A-101 CHT Adaptor. Allows quick disconnect of P-101.</p>	3/8"-24	N/A
	<p>P-102-XX CHT Probe. "Sparkplug" Style</p>	12, 14, or 18 mm gasket	700' (F)
	<p>P-102-3/8 CHT Probe. "Piggyback" Style</p>	3/8" Gasket	700' (F)
	<p>P-110 Standard EGT Probe. Hose Clamp Style</p>	.187" Diameter Hole	1700' (F)
	<p>Fast Response P-110 Fast Response EGT Probe. Hose Clamp Style</p>	.125" Diameter	1700' (F)
	<p>P-111 TIT Probe. Can be used in pressure environment.</p>	1/8" NPT	1700' (F)

	<p>P-112 TIT Probe. Can be used in pressure environment.</p>	<p>7/16"-20</p>	<p>1700' (F)</p>
	<p>P-114 TIT Probe. Can be used in pressure environment.</p>	<p>1/4" NPT</p>	<p>1700' (F)</p>
	<p>P-120 Oil Temp Probe. Can be used in pressure environment.</p>	<p>5/8"-18</p>	<p>700' (F)</p>
	<p>P-128 OAT/Carb Temp Probe (Exposed Tip). Can be used in pressure environment.</p>	<p>1/4"-28</p>	<p>700' (F)</p>
	<p>P-128S OAT/Carb Temp Probe (Sealed Tip). Can be used in pressure environment.</p>	<p>1/4"-28</p>	<p>700' (F)</p>
	<p>P-104 Universal Probe (Surface Temp)</p>	<p>#6 Hole</p>	<p>700' (F)</p>